




High Efficiency –
Monocrystalline

Overview

- High efficiency solar cells (approx. 18%) with quality silicon material for high module conversion efficiency and long term output stability and reliability.
- Positive power output tolerance from 0% to +5%.
- Rigorous quality control to meet the highest international standards.
- High transmittance, low iron tempered glass with enhanced stiffness and impact resistance.
- Unique frame design with strong mechanical strength for greater than 50 lbs/ft² wind load and snow load withstanding and easy installation.
- Advanced encapsulation material with multilayer sheet lamination to provide long-life and enhanced cell performance.
- Outstanding electrical performance under high temperature and weak light environments.

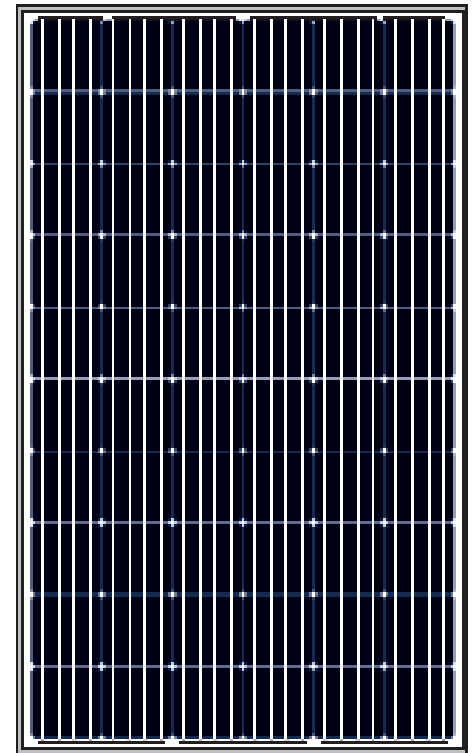

Applications

- Any large or small on-grid /off-grid solar power stations.
- Commercial/industrial building roof-top and ground systems.
- Residential roof-top and ground systems.

Warranty

- 10 year limited product warranty on materials and workmanship.
- 25 year warranty on >80% power output and 10 year warranty on >90% power output.
- Refer to warranty document for detailed warranty information.

Certifications

UL 1703, CEC Listed

Type 1 Fire Classification

Mechanical Specifications

Characteristic	Details
Cell Size	156mm x 156mm (6.14" x 6.14")
Module Dimension (L x W x T)	1650mm x 991mm x 40mm (64.9" x 39.0" x 1.57")
No. of Cells	6 x 10 = 60
Weight	18.2 kg (40.1 lbs)
Cable Length	1000mm for positive (+) and negative (-)
Type of Connector	MC-IV
Junction Box	IP67 Rated
No. of Holes in Frame	8 installation holes, 16 drainage holes

MODEL: GS-S60LSQ-285-PR



Electrical Specifications

(STC* = 25 °C, 1000W/m² Irradiance and AM=1.5)

Model	GS-GS-S60LSQ-285-PR
Max System Voltage (IEC/UL)	1000V
Maximum Power at STC	285 W (0%, +5%)
Listed PTC Power	212.02 W
Voltage at Maximum Power Point V_{mpp}	31.85 V
Current at Maximum Power Point I_{mpp}	8.97 A
Open Circuit Voltage V_{oc}	39.25 V
Short Circuit Current I_{sc}	9.45 A
Module Efficiency (%)	17.64%
Temperature Coefficient of V_{oc}	-0.34% /°C
Temperature Coefficient of I_{sc}	+0.049% /°C
Temperature Coefficient of P_{max}	-0.40% /°C

*Standard Test Conditions

Physical Specifications mm

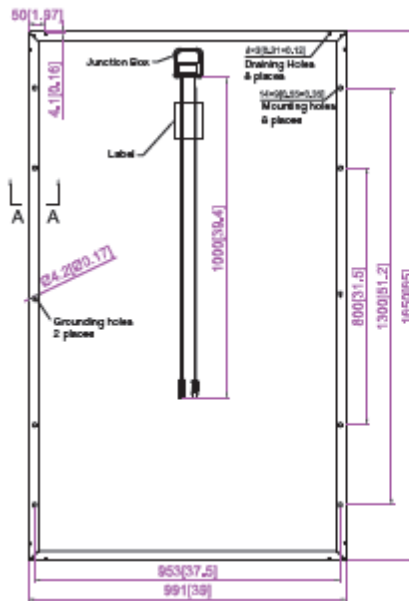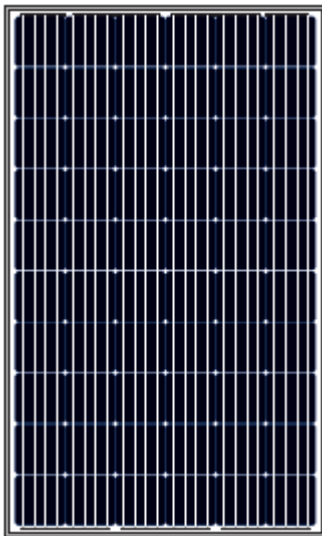

Other Performance Data

Power Tolerance	Operating Temperature	Max Series Fuse Rating	NOCT*
0%, +5%	-40 °C to +85 °C	15A	45 °C

*Normal Operating Cell Temperature

www.GrapeSolar.com

For service or support call

1-541-349-9000

1305 South Bertelsen Road
Eugene, Oregon 97402, USA

Tel: 541.349.9000 Fax: 541.343.9000